GTXpro/Bulk DTF R2R




We share our experience to give you the best support

PRINT SETTINGS

This is a guide with **recommended** print settings for **Schulze and ITEX** film. These settings refer to the use of **GLB Film**.

RECOMMENDED SETTINGS FOR SCHULZE AND ITEX FILM

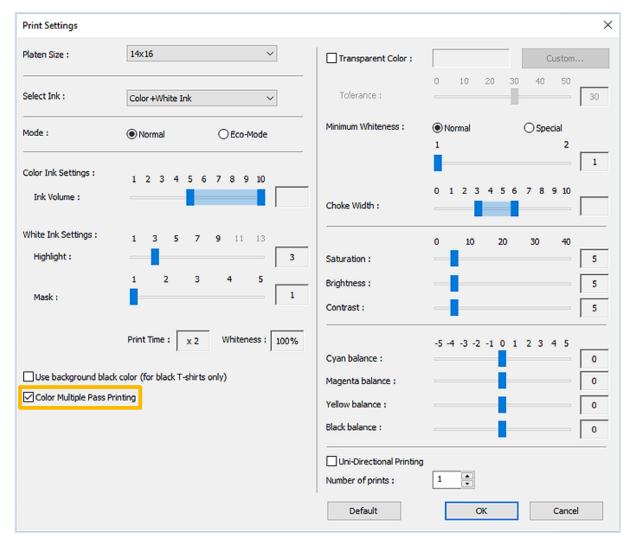

Setting	Value
Ink Volumne	5 – 10
Highlight	3
Mask	1
Color Multiple Pass Printing	Activated
Choke Width	3 – 6

Heat Press Settings (cotton)	Value
Temperature	160°
Pressure	3 bar
Time	15 seconds
Repressing process after removing the film	5 seconds

HELPFUL: - A high level (max 10) of the **Ink Volume** is better for colour gradients.

- A medium level (5) of th **Ink Volume** is better for clear shades.
- In terms of Choke Width, start with level 6 and try to lower it.

It is also recommended to repress the print for 5 seconds after removing the film to reach a higher washing fastness.